

KING KONG EC SERIES SOLAR PANELS

GSMO-YWET210-20A

210W20V

Grade A high-efficiency
monocrystalline silicon
laminated solar panel



XI'AN GO SOLARV NEW ENERGY
TECHNOLOGY CO., LTD.

Committed to diverse applications of PV




GSMO-YWET210-20A

210W20V


TOPCON

The Kingkong EC series consists of standard monocrystalline photovoltaic modules featuring TOPCON solar cells, which increase power output per unit area. Built with tempered glass and an aluminum alloy frame, these durable modules offer strong mechanical performance and operate stably in diverse environments with high efficiency. They also show minimal power degradation—retaining at least 90% of initial output after 10 years and 80% after 20 years. With excellent reliability and long-term performance, they are ideal for a wide range of applications.

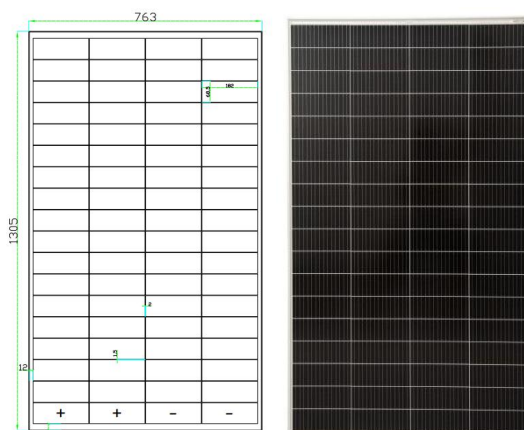

MECHANICAL PARAMETERS

Cells configuration	4×18
Junction box	Single-cell junction box, Two diodes
Output Cables	4mm ² ,The positive and negative electrodes are both 900 mm
Glass Type	3.2mm Tempering、Ultra white
Frame	Anodized aluminum alloy frame
Net weight	10.5Kg
Size	1305*763*35mm

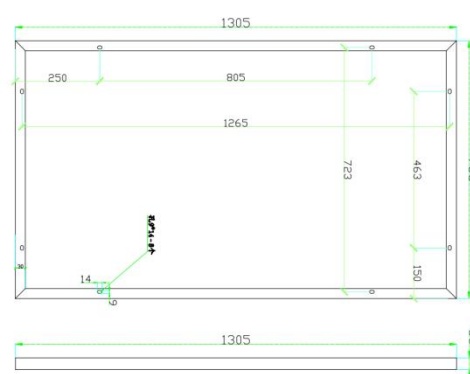

ELECTRICAL PERFORMANCE PARAMETERS

Cell type	TOPCON Monocrystalline
Model	GSMO-YWET210-20A
Standard power	212.61W
Peak voltage (Vmp)	22.45V
Peak Current (Imp)	9.47A
Open Circuit Voltage	24.61V
Short Circuit Current	9.95A
Test standards	STC : AM1.5 1000W/m ² 25°C

WORKING PARAMETERS

OTR	- 40°C — +80°C
Power Tolerance	±2%
System Voltage	DC1000V
Maximum fuse rating	20A
Nominal temperature	45±2°C
Safety Class	Class II
Fire resistance rating	Class C

LOAD CAPACITY

Front static load	3600Pa
Rear static load	2400Pa
Hail Impact test	Diameter: 25mm, Impact speed: 23m/s

TEMPERATURE COEFFICIENT

TC Power	- 0.30%/°C
TC Voltage	- 0.28%/°C
TC Current	+0.05%/°C



All data contained in this specification are subject to change without further notice.