


VT CG Hygienic cable gland Type S

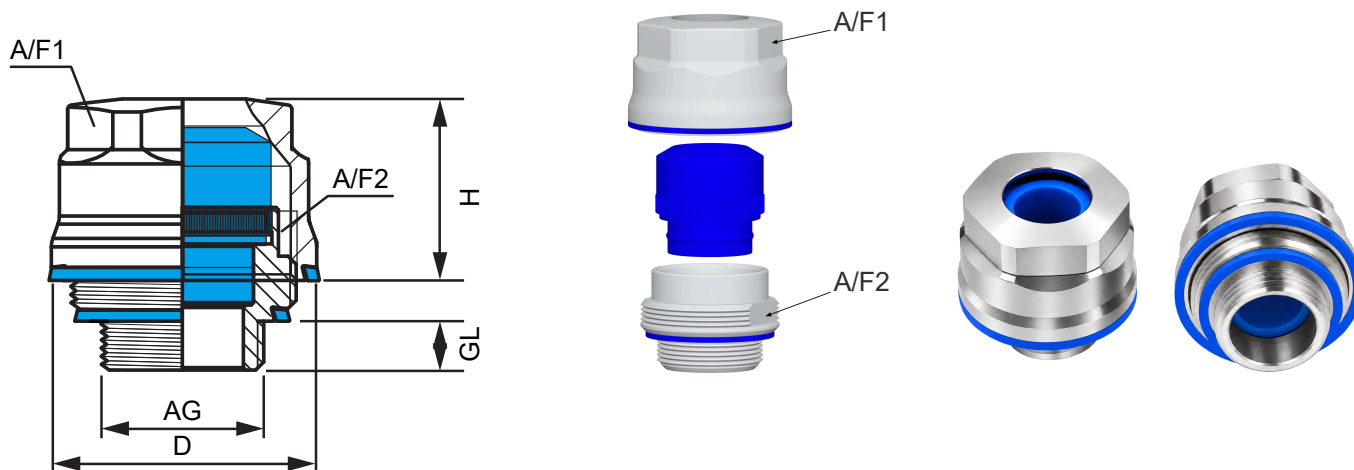

1

2

Thread AG	Cable range (mm)	D (mm)	H (mm)	GL (mm)	A/F (mm)
M12×1.5	4-7	21	19	6	14
M16×1.5	4-6; 5.5-8; 7.5-10	27	20	6	19/21
M20×1.5	4-6; 5.5-8; 7.5-10; 9.5-12; 11.5-14	33	22.5	6	24/27
M25×1.5	11.5-14; 13.5-16; 15.5-18	38	23.5	7	30
M32×2.0	18-20.5; 20.5-23; 22.5-25	45	26.5	8	36

Gland

AISI 316L stainless steel / EN 1.4404

Surface finish

Polished finish (Ra < 0.8 µm)

Cable seal (Food grade)

Silicone -60 °C to +200 °C

Blue | Hardness 80 - 5 Shore A

FDA-compliant silicone material

IP68 IP69K

Sealing ring

3

HNBR -25 °C to +150 °C

H

Blue | Hardness 85 + 5 Shore A

EPDM -40 °C to +120 °C

E

Blue | Hardness 85 ±5 Shore A

FDA-compliant sealing-ring materials

Temperature limits apply to each seal material.

3-A certified RoHS

Ordering Code

1 2 3
VT CG-M20×1.5-(7.5-10)-H

1 Thread AG

2 Cable range (mm)

3 Material (sealing ring)