Latches Installation instructions

VAYTRON

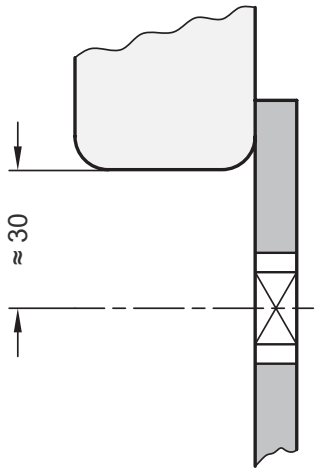
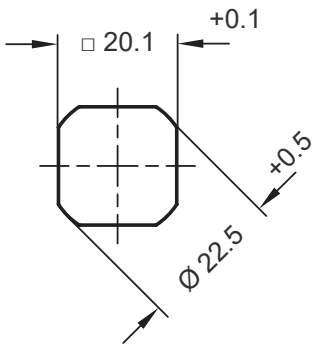
Technical and assembly instructions

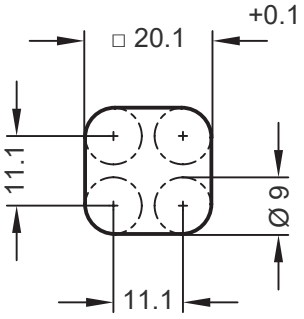
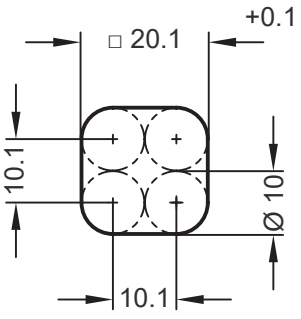
Prepare the mounting cutout in the door, cover or hatch as shown.

Insert the lock housing from the front and secure it from the rear with the mounting nut.
Attach the latch bar with the hex-head screw.

The cutout is typically punched or laser-cut in series production; drilling or milling may also be used.

Mounting panel thickness: 0.5–6 mm.

Bore distance	Installation bore for punching or laser cutting
	

Installation bore for drilling or milling	
	

All dimensions in mm